

PEN LINE REQUIREMENTS

SPRINGER REQUIREMENTS

PERMITTED WEIGHT

Concrete in Poly Pipe
(No Steel)




PREFERRED

Rubber Extending
Absorber



No weight required

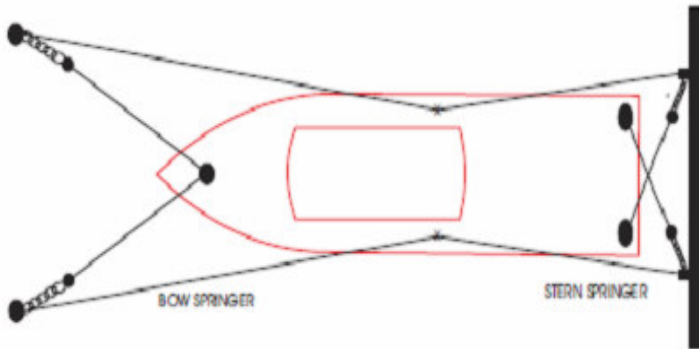

NOTICE:

Pen Line Requirements

Please note that bow and stern lines require dampening by either weights or rubber extending dampeners.

- Only rubber extending dampeners can be used on or near steel piles. Club preference is rubber extending dampeners.
- Conventional weights can be used where there are wooden piles but need to be set 500mm clear off piles when attached to the boat.

- Club Preference is to use springs on bow and stern lines instead of weights
- If weights are used they must be set with a minimum of 500mm between weight and pile (wooden pile)
- Note no weights are permitted where steel piles are used, rubber springs can only be used

Pen Mooring Line Set Up

- 2 x Stern Lines Crossed (dampened)
- 2 x Bow Springers
- 2 x Bow Lines (dampened)
- 2 x Stern Springers